




Power Supply (Trigger) Specification

Model Type	KC-APC2424-1THE	KC-APC2424-2THE	KC-APC2460-4T
Lighting Method	Constantly bright		RMB,often switchable/trigger
Drive mode	Constant pressure		
Dimming method	Variable Voltage Control		
	Panel Knop		
Number of channels	1 Channel	2 Channel	4 Channel
Input voltage	AC 100V ~ 200V		
Output voltage	DC24V		
Output maximum total current	1A		2.5A
Single - Channel output maximum current	1A		2.5A
Output Power	24W		60W
Trigger input	DC5V - 24V		
Trigger delay	< 15 μ s		

Dimension

KC-APC2424T-2THE

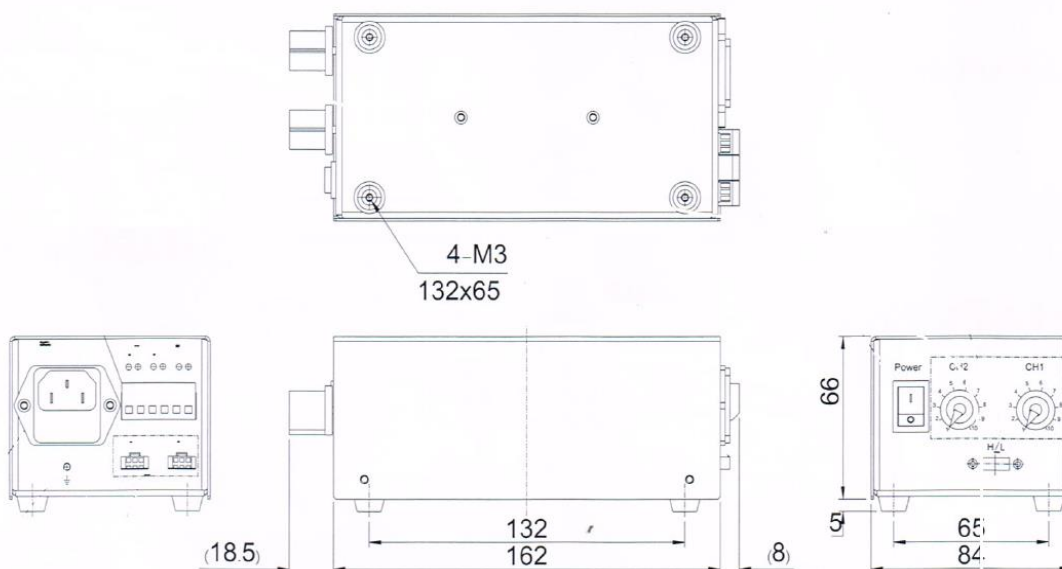

KC-APC2460P-4T

