




Power Supply Digital Specification

Model Type	KC-HDPC2465D -4T
Input voltage	AC 100V ~ 200V
Output voltage	1 ~ 24V
Output maximum total current	2.7A (Single chanal maximum 2A)
Chanal	4
Maximum Power	65W
Over Current protection	Peak current out put 3A
Remode Control	Serial Communication Control
Brightness Control	0 ~ 255
Operation environment	Temperature : 0~ 40 °C Humidity : 20 ~85% RH (without Fogging)
Trigger delay time	40 us
Trigger voltage	5V ~ 24V


Dimension

KC-DPC2465D-4T

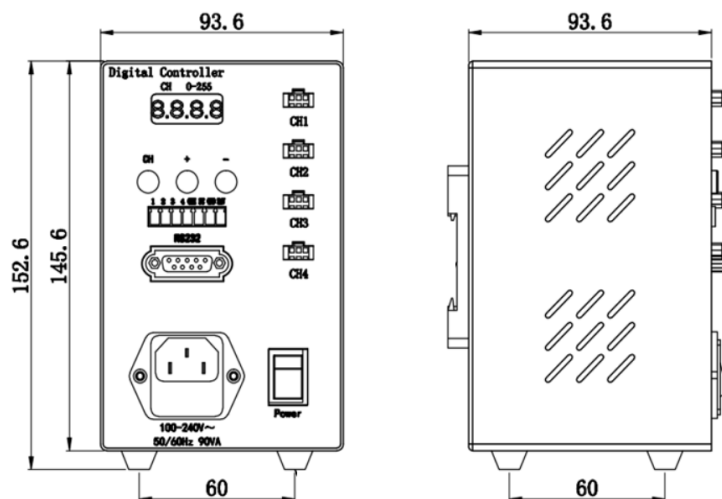

Control lighting by I/O Trigger

1.CH setting : H 0



2.Wiring Assembly

